



P O L Y K E N 221

I N D U S T R I A L T A P E S

POLYKEN® 221

Premium Grade Duct Tape


APPLICATIONS

- Screen blocking of frames in the screenprint industry.
- Waterproof packaging.
- Can and barrel sealing.
- Sealing white, pre-formed duct joints.
- Sealing tape for sidewall building materials.
- Sealing flexduct connections.

FEATURES & BENEFITS

- High performing PE coated cloth tape.
- Solvent resistant natural rubber adhesive.
- Highly conformable.

CONSTRUCTION

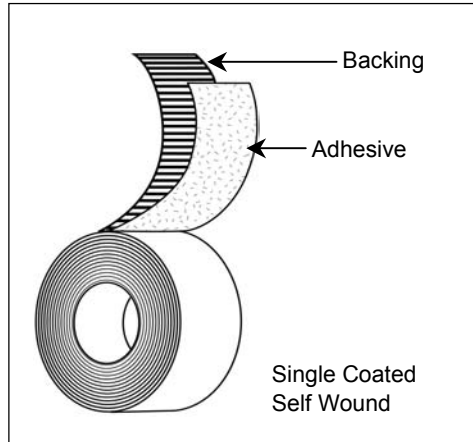

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Natural Rubber Based

Colors:

- White

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	0.305 mm	ASTM D 1000
Adhesion to Steel	75 oz./in.	84.0 g/mm	PSTC-1
Adhesion to Backing	30 oz./in.	33.60 g/mm	PSTC-1
Tensile Strength	33 lb./in.	0.59 kg/mm	ASTM D 1000
Tack (Rolling Ball)	2"		
Maximum Performance Temperature	200 F		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

Tyco
Adhesives

CORPORATE HEADQUARTERS

1400 PROVIDENCE HWY
NORWOOD, MA 02062

1-800-343-7875

Fax: 1-800-328-4822

www.tycoadhesives.com