



HYDRA



Wow® Clear is a transparent base specifically designed to be pigmented.

Totally suitable for Virus Mixing System.

WOW® technology allows printing wet on wet both half tones and “vector prints” avoiding intermediate flash unit.

As all the other products of the **WOW®** range also


WOW® CLEAR can be printed at 120/305 mesh counts.

For “vector prints” we specifically recommend 90/230 mesh count.

WOW® is an ink at high technological content, easy to use and it doesn't clog the screen.

Totally suitable with HYDRA WHITE 120 E.

WOW® CLEAR

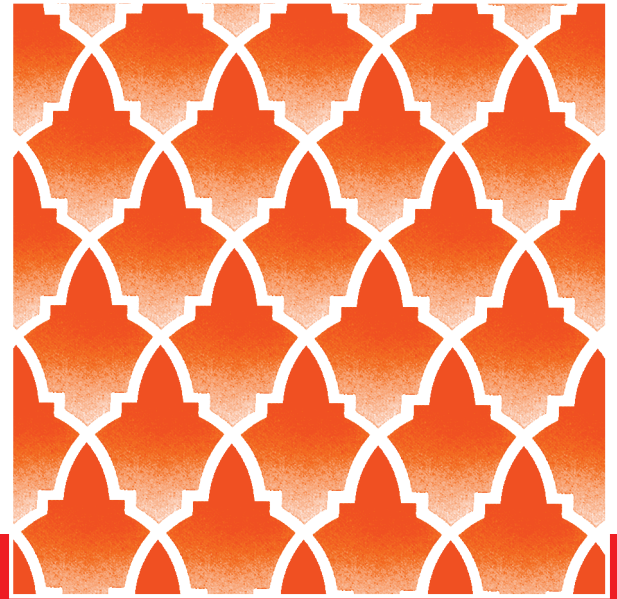

technical sheet

COLOUR 1 - RECIPE	RATIO	SCREEN	COLOUR 2 - RECIPE	RATIO	SCREEN
WOW CLEAR	95	120/305			
AQUATINT PIGMENT ORANGE	5	VIRUS GEL 3 STANDARD			
		SQUEEGEE			SQUEEGEE
		85 SHORE			
COLOUR 3 - RECIPE	RATIO	SCREEN	COLOUR 4 - RECIPE	RATIO	SCREEN
		SQUEEGEE			SQUEEGEE

PRINTER PARAMETERS	PRINTING PROCEDURE		SUITABLE ADDITIVES
DRYER TEMPERATURE	160°C - 320°F	1	HYDRACRYL RETARDER: Retarder designed to further improve screen stability of HYDRA, HYDRACRYL, GEO and PERFETTO. Add 3-5% of HYDRACRYL RETARDER to the inks. Formaldehyde free and phthalate free.
CURING TIME	1,5 MIN		
SQUEEGEE ANGLE	20°		
PRINTING SPEED	MEDIUM		
SCREEN CLEAN UP			UNIFIX LC: Additive specifically designed to ensure the proper resistance to frequent washings at high temperatures. up to 3-5% to be thoroughly mixed with the ink Phthalates and formaldehyde free Formaldehyde and phthalate free.
USE WATER			
COMMENTS			

COLOUR 1	COLOUR 2	COLOUR 3	COLOUR 4

HYDRA REDUCER 120:
To reduce viscosity, just add 3% of HYDRA REDUCER 120.
Formaldehyde and phthalate free.

